


ORCHARD LOW PROFILE SERIES OWNER'S MANUAL

Orchard Low Profile Series

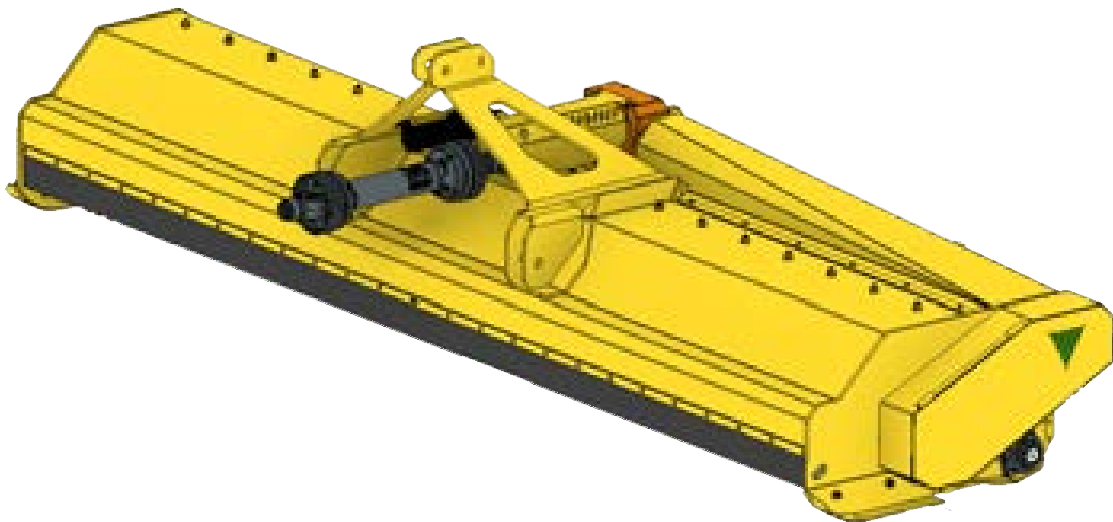

VALLEY TOOL
MANUFACTURING COMPANY

PO Box 220 | 2507 Tully Road | Hughson, CA 95326 | 800-426-5615
www.valleytoolmfg.com

Table Of Contents

Introduction

Thank You	1
Warranty	2

Safety

Operational Safety	3-4
Maintenance Safety	4

Basic Operation

Attaching to Power Unit	5
Starting / Running / Shut Down	5-6

Adjustments & Maintenance

Cut Height / Wear Components / Cleaning	7-8
Lubrication	9-10

Transport

Transport / Removal / Storage	11
-------------------------------	----

Questions

Frequently Asked Questions	12
----------------------------	----

CALIFORNIA PROPOSITION 65



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.



ADVERTENCIA: Cáncer y Daño Reproductivo - www.65Warnings.ca.gov.

Thank You

Dear Customer,

Thank you for purchasing a Vrisimo attachment. This manual has been prepared to acquaint you with the operation, adjustment and maintenance of your new attachment. It was carefully designed and manufactured under the highest industrial standards to give you years of dependable service. Read this manual carefully and fully understand the operation of the machine before attempting to operate it. Vrisimo Flail Mowers & Shredders reserves the right to make changes in design and specifications, and/or to make additions to or improvements in its product without imposing any obligation upon itself to install them on its products previously manufactured. If at any time you require additional information, consult your authorized dealer or the customer service department.



PO Box 220 | 2507 Tully Road | Hughson, CA 95326

1-800-426-5615

www.valleytoolmfg.com

ATTENTION

The safety of the operator was one of the primary concerns of Vrisimo Flail Mowers & Shredders when designing this attachment. Shielding, simple adjustments and other safety features were built into this attachment whenever possible. Be sure you and the people working for you read and understand this manual. All machinery should be operated only by responsible persons who have been trained to operate in a safe manner and have read and understand this manual.

IMPORTANT TO PURCHASER

Customer Ownership Registration

Prior to acceptance of the equipment, thoroughly check off the pre-delivery checklist with the sales representative. Be sure you fully understand the operation, adjustment and safety rules as outlined in this manual.

Vrisimo Flail Mowers & Shredders is solely owned by Valley Tool and Manufacturing.

Have industrial applications? Own a skid steer or mini excavator? For our full line of industrial equipment visit: www.valleytoolmfg.com

Warranty

For a period of 12 months from date of delivery of product to the original user/owner, Valley Tool & Mfg. warrants each product to be free from manufacturing defects, subject to the limitations contained in this policy.

This warranty does not apply to defect caused, in whole or in part, by unreasonable use while in the possession of the user, including, but not limited to: failure to properly set up product; failure to provide reasonable and necessary maintenance; normal wear; routine tune ups or adjustments; improper handling or accidents; operation at speed or load conditions contrary to published specification; improper or insufficient lubrication; improper storage. This warranty is also not a guarantee that the performance of each product will meet the expectations of the purchaser.

Valley Tool & Mfg. shall not be liable for consequential damages of any kind, including, but not limited to: consequential labor costs or transportation charges in connection with the replacement or repair of defective parts; lost time or expense which may have accrued because of said defects. In no event shall Valley Tool & Mfg. total liability hereunder exceed the product purchase price.

Valley Tool & Mfg. makes no warranty with respect to trade accessories or any components or accessory of the product which was not manufactured by Valley Tool & Mfg., including any purchased components of any kind. These are subject to the warranties of their respective manufacturers. The warranty will be considered void if the product or any part of the product is modified or repaired in any way not expressly authorized by Valley Tool & Mfg., or if closed components are disassembled prior to return. Closed components include, but are not limited to: gearboxes, hydraulic pumps, motors, cylinders, and actuators.

Our obligation under the warranty is expressly limited, at our option, to the replacement or repair at Valley Tool & Mfg., of Hughson CA, or at a service facility designated by us, or such part or parts as inspection shall disclose to have been defective. We are not responsible for unauthorized repairs or replacements. Warranty must be pre-approved. Authorized parts will be sent to dealer UPS at no charge. Any implied or statutory warranties, including any warranty merchantability or fitness for a particular purpose, are expressly limited to the duration of this written warranty. We make no other express or implied warranty, nor is anyone authorized to make any on our behalf. This warranty cannot be extended, broadened, or changed except in writing by an authorized officer of Valley Tool & Mfg. No warranty will be processed without the timely registration of the signed "Delivery Report".

Travel time of mechanics and transportation of the product to the authorized service dealer for warranty work are the responsibility of the attachment owner.

Valley Tool & Mfg offers the most reasonable and dealer -friendly return policy in the market. We will accept returns within 30 days of original receipt. All returns must be approved by Valley Tool & Mfg and a return authorization number must be issued prior to return shipment. Returns must be received in "like-new" condition and with all of the original factory packaging including manuals. Additional charges will apply if an item is received that is not in "like-new" condition or that is not in original factory packaging. After a return has been fully inspected by our staff, refunds will issued less shipping charges and any other possible damage fees. Please allow up to 30 business days for your account refund credit to be processed.

Please direct all return-related questions to sales@valleytoolmfg.com.

Safety

Failure to heed any of these warnings may result in personal injury or death.

A. Operational Safety

Before operating this machinery read the owner's manual thoroughly.

Do NOT operate this machine without proper training. It is the Owner's responsibility to ensure all Operators are properly trained in the appropriate language.

Use OSHA approved eye, ear and head protection to protect the Operator from flying debris and noise.

Avoid wearing loose clothing as it can inadvertently be drawn into moving parts. Never use drugs or alcohol before or during operation of this machine.

Only operate this machine when it is in good working order on an appropriate power unit that is in good working order, and with all guards and safety devices in place and functioning.

Be aware of the machine's weight and its effect on the stability of the power unit.

Use flashing warning lights when operating on highways, except when prohibited by law.

Always inspect area to be worked to ensure that the jobsite is free from obstacles and debris that could injure the operator or damage the machine.

Operate at a safe speed (typically 0-5 mph) in consideration of the local terrain, moving slower when operating on or near slopes, ditches or drop-offs.

Avoid running the machine along the ground in rocky areas as this could create dangerous discharge.

Keep bystanders and children clear of the work area during operation as debris can be discharged in a dangerous manner. The minimum safe distance from discharge is 100 ft.

Never allow children or other persons to ride on this mower.

Be aware that this machine may be wider than the power unit, and caution should be used to avoid clipping or running over trees, signs or posts that may be in the way of the machine.

Avoid operation that would allow hydraulic lines to be pinched or severed. In the event of a hydraulic leak, hydraulic fluid may have sufficient force to penetrate skin. Hydraulic injection injury requires immediate medical attention.

Avoid sharp turns or fully lifting mower with PTO engaged. This will produce knocking in the PTO shaft and accelerated wear of drive train components. The drum should not be rotating when the deck is fully lifted.

Be aware of the risks of equipment and grass fires. To mitigate those risks:

- Do not smoke or have an open flame in the work area.
- Do not operate in areas that have been freshly burned or are still burning.
- Do not allow clippings/debris to collect near hydraulic components or bearings.
- Avoid areas with high fire risk: dry grass, brush or trees.

Operation of this machine should be stopped immediately if the Operator's vision becomes obscured by the discharge of debris and dust. Also avoid operating this machine in unusually foggy or dusty conditions or at night.

Keep away from the machine until all the energy has dissipated. This includes the complete stopping of the drum's rotation as well as the dissipation of pressure in the hydraulic lines.

In the event that a failure does occur during operation or if the machine begins to produce excessive noise or vibration, shut the machine down immediately and repair before continued use.

In addition to the design and configuration of equipment, hazard control and accident prevention are dependent upon the awareness, concern and prudence and requires suitable training of personnel involved in the operation, transport, maintenance and storage of equipment.

B. Maintenance Safety

Before performing maintenance on this machine read the owner's manual thoroughly.

Maintenance should only be performed by properly trained individuals. It is the owner's responsibility to ensure all individuals involved in maintaining the machine are properly trained in the appropriate language.

Be sure to inspect all safety devices before each use. If safety devices are worn in such a way that they can no longer properly perform their guarding function contact your nearest Vrisimo dealer for replacements.

Maintain all safety decals and make sure they are visible to the operator. If decals are worn, contact your nearest Vrisimo dealer for replacements.

Replace cracked or broken blades with new ones. Do not attempt to weld damaged blades. This can cause damage that could result in the blade being thrown from the shredder.

Wear gloves and eye protection and exercise care when handling blades as they can be sharp. Also be alert to worn or damaged surfaces that could have sharp edges.

Disengage PTO, shut off engine and allow all movement to stop before leaving the operator's position to adjust, lubricate, clean or unclog the machine. Do not try to uncouple hydraulic hoses unless the pressure has adequately dissipated.

Before working on or underneath the machine, place wheel chocks in front and back of power unit's tires or treads and under each end of the attachment to prevent accidental lowering of the machine. Also, remove the ignition key from the power unit and allow all movement to stop before beginning work.

Basic Operation

A. Attaching to the Power Unit

The person that is attaching your Vrisimo product should be familiar with the attachment and removal of equipment from a 3-point hitch and be able to do so safely.


Attachment should be performed on flat ground away from obstructions. During attachment, keep hands out of pinch points and away from the blades to avoid injury.

The tractor PTO should be disengaged and removed completely before trying to attach Power Unit to the mower, failure to do so could result in damaging the PTO shaft.

1. Back the tractor so the lift links arms are in-line with the mower's hitch pins.
2. Shut off engine and disengage PTO. Block tractor wheels before you place yourself between the tractor and the mower.
3. Attach the tractor's left and right lift links to the corresponding hitch pins of the mower. Secure both connections with lynch pins.
4. Adjust sway chains or bars so there is a minimum of side slack. Be sure the stabilizers are tight.
5. Attach the tractor's top link to the "A" frame of the mower. Adjust the link out to the approximate desired cutting height.
6. Attach PTO shaft between tractor and mower. Remember, tube end goes to the mower and bar end goes to the tractor.
7. Do not raise the mower while the PTO is engaged, since this will cause the PTO shaft to bind or even break, and may cause injury to the operator.

B. Starting Procedure

1. Check that the attachment is in the down position and that the blades are not in contact with ground. Start engine and set throttle to idle. Never engage the PTO with the motor above idle speed.
2. With the motor at low RPM engage the PTO output.
3. Slowly bring the throttle up to operating RPM. If the Attachment produces excessive noise or vibration, disengage the PTO and shut down the Power Unit immediately. Determine the cause of the problem and correct it before continuing with its operation. Maximum PTO speed is 540 RPM.
4. Attachment is ready for operation.

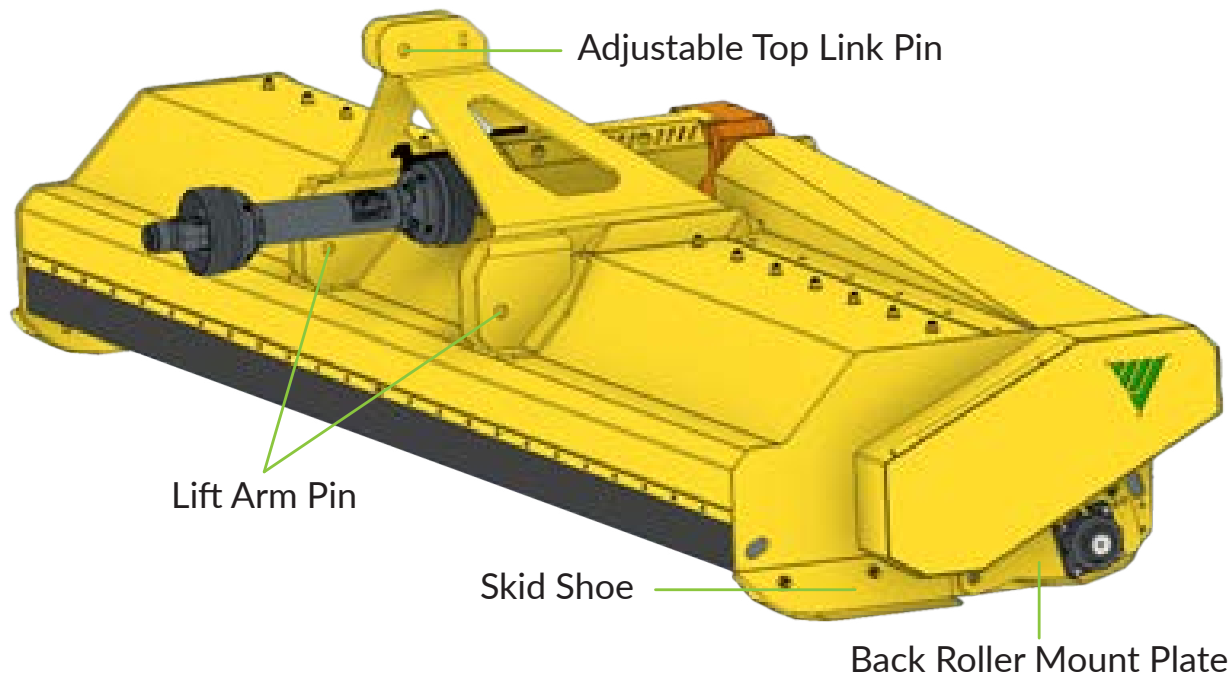

C. Running Your Attachment

1. Determine ground speed based on terrain and material being cut. This will typically fall within the 0-5 mph range.
2. Adjust the hitch to the approximate desired cutting height.
3. Position skid shoes between 1/2-3" off the ground; skid shoes are not meant to run on the ground.
4. The mower and skid shoes should be level with the ground, the height of the mower can be adjusted with the back gauge roller which runs along the ground and works in conjunction with top link.
5. Make sure PTO shaft is properly attached.
6. With the PTO disengaged, operate lift arms through entire range of motion. Check for binding, bottoming, uncoupling, or contact with attachment.

D. Shut Down Procedure

1. When work is completed, disengage the PTO shaft and position it for storage or transport (See the "Storage and Transport" section for details on proper storage). Shut off Power Unit and set parking brake, wait for the attachment to stop rotating.
2. Visually inspect the PTO shaft, all the bearings and gearbox for excessive heat or leaks.

Adjustments & Maintenance

Note: Before performing maintenance, ensure all motion has stopped and that the Power Unit is powered down with ignition key removed. Before working on or underneath the mower, place blocks on both sides of the Power Unit's tires and underneath both ends of the mower to prevent accidental lowering of the machine.

A. Cut Height Adjustments

1. The cutting height of the mower can be adjusted by shortening and lengthening the adjustable top link.
2. The entire weight of the mower should be on the back gauge roller. The skid shoes should be adjusted so there is 1/2"-3" clearance between them and the ground. The shoes are for added protection against tree roots, ridges or borders and are not designed to slide on the ground. Adjust the back gauge roller by removing the bolts from both back roller mount plates, setting to the correct height, and reinstalling bolts.

B. Wear Components

Wear components such as knives, belts and bearings may wear at different rates. Each should be inspected for wear independently.

Belt Tension

1. Belt adjustment is done by tightening the idler adjusting rod which pushes the top pulley into the belts. On a new machine, after 1-2 hours of operation, tighten the drive belts so there is 1/4" to 3/8" give with 8 pounds of force.

Knives


1. When individual knives, bolts or spacers become worn or damaged they must be replaced with hardware saved from your previous knife replacement. Replacing an individual station with new hardware could cause the cutter drum to run out of balance. When replacing hardware at all the stations, some old hardware should be saved to replace future broken hardware.

2. Replacing the complete knife assembly is done by removing the hanger rod. Re-insert hanging rod inserting a new knife assembly at each station.
3. To replace the knife only, rotate the 7/16" D-Ring until slot is exposed. Disconnect from quick connect changer. Replace the knife and reconnect knife to D-Ring then proceed to connect D-Ring back to quick connect changer repeat this process until completed.

C. Cleaning The Mower


1. Check for excessive grease in bearing areas on the pulley side of the mower. Make sure grease is not allowed into the belt areas.
2. Clean any clippings from the gearbox areas, pulley areas and anywhere else that is prone to excessive heat where fire can start.
3. Clean the inside of the mower with a pressure washer make sure the inside of the mower is kept free from mud and compact grass. Mud built up on the cutter drum can cause imbalance.
4. Preserve damaged decals or replace them if they are unreadable. Decal kits can be obtained from your local Vrisimo dealer.

Adjustments & Maintenance

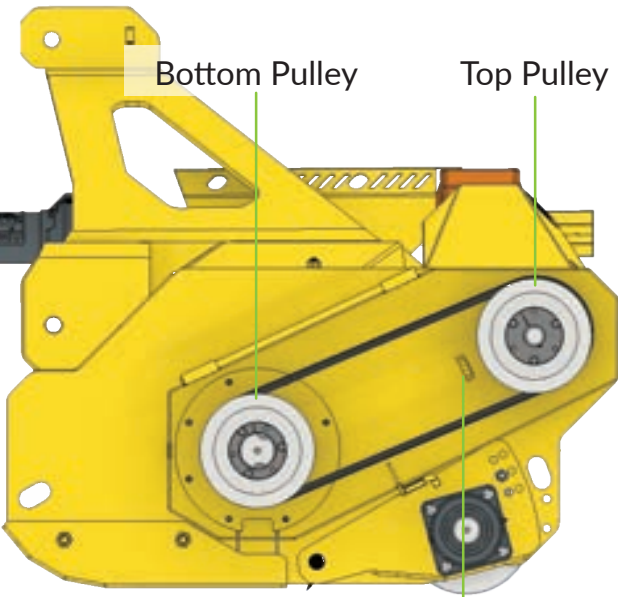


Belt Tension

Tension Adjustment

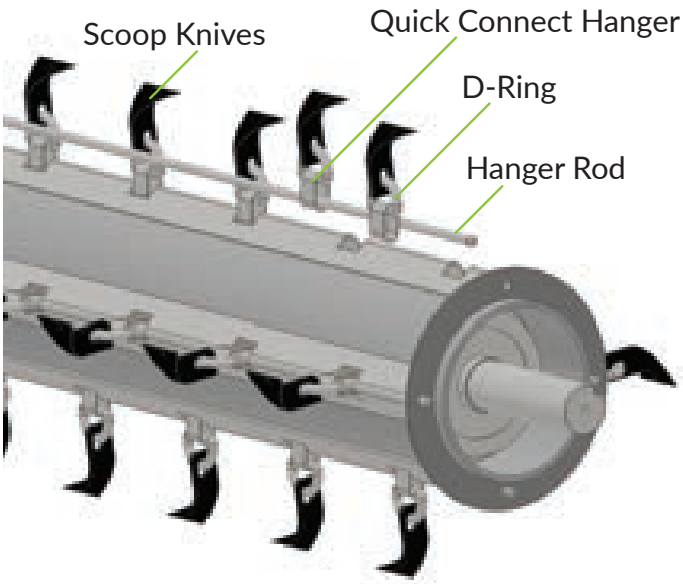

Cutter Drum / Knives

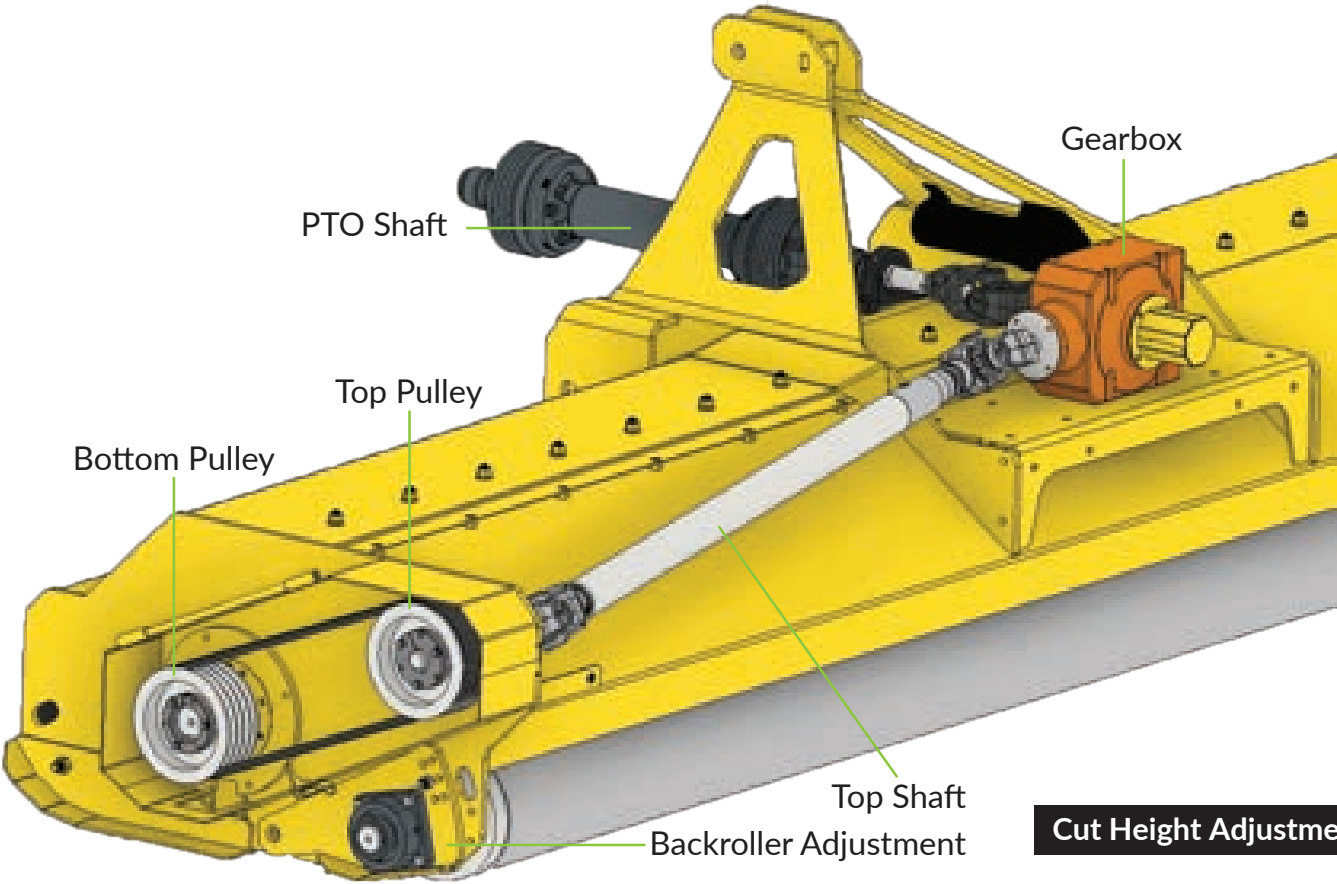


Cut Height Adjustment

Adjustments & Maintenance

D. Lubrication

Cutter Drum

1. There are two Grease zerk fittings to lubricate per bearing housing. There is an outer and inner zerk on each side of the mower.
2. Valley Tool recommends greasing with **NLGI 2 ISO VG100**. Any lithium based NLGI Grade 2 grease that is ISO 100 VG and of high quality will work. DO NOT use grease designed for tractor pins and bushings.
3. The CD-3001 is factory assembled with grease for over 300 hours of operation, and only requires 6 pumps of grease every 300 hours of operation. Use of a pneumatic grease guns is not recommended as it is difficult to control the amount of grease being applied. While it is not necessary to “run-in” the bearing with each grease interval, if an excessive amount of grease has been applied the risk of failure can be mitigated by allowing the bearing another “run-in” period.

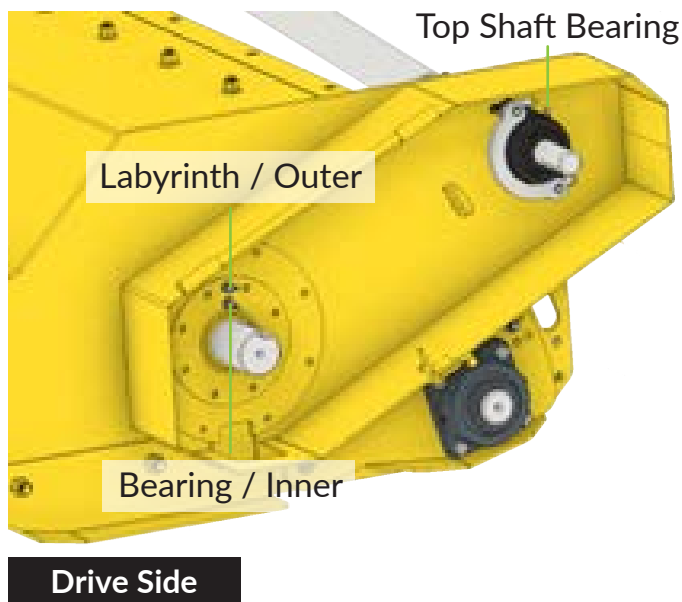

Maintenance Table

LUBRICATION	FLUID	HRS
Top Shaft Bearings	NLGI 1.5 ISO VG460	10
Backroll Bearings	NLGI 1.5 ISO VG460	10
Driveshaft Yokes	NLGI 1.5 ISO VG460	10
Driveshaft Slides	NLGI 1.5 ISO VG460	10
Cutter Drum Labyrinth	NLGI 2 ISO VG100	10
Cutter Drum Bearing	NLGI 2 ISO VG100	300
Gearbox	SAE 80W-90	300

Back Roller

1. The back roller uses a four bolt flange style bearing. There is one on either side of the back roller. Grease daily as the back roller is exposed to the most debris.
2. The The back roller bearing uses **NLGI 1.5 ISO VG460** grease and should be greased after each time used. Depending on conditions back roller bearings may require more or less grease.

Top Shaft

1. All top shaft bearings and yokes need to be greased weekly with **NLGI 1.5 ISO VG460**.

PTO


1. Grease daily as the PTO shaft can not be over greased. PTO shaft and tractor can be damaged if run dry. PTO shaft will bind up and not telescope in and out properly.
2. The PTO shaft should be greased with any standard grease as long as it is **NLGI 1.5 ISO VG460**.

Gearbox

1. Check gearbox oil level periodically and refill as required. Replace gearbox oil every 300 hours.
2. Use quality **SAE 80W-90** gear oil. Be sure gearbox is in level position and remove side plug to fill.

Adjustments & Maintenance


Maintenance Locations

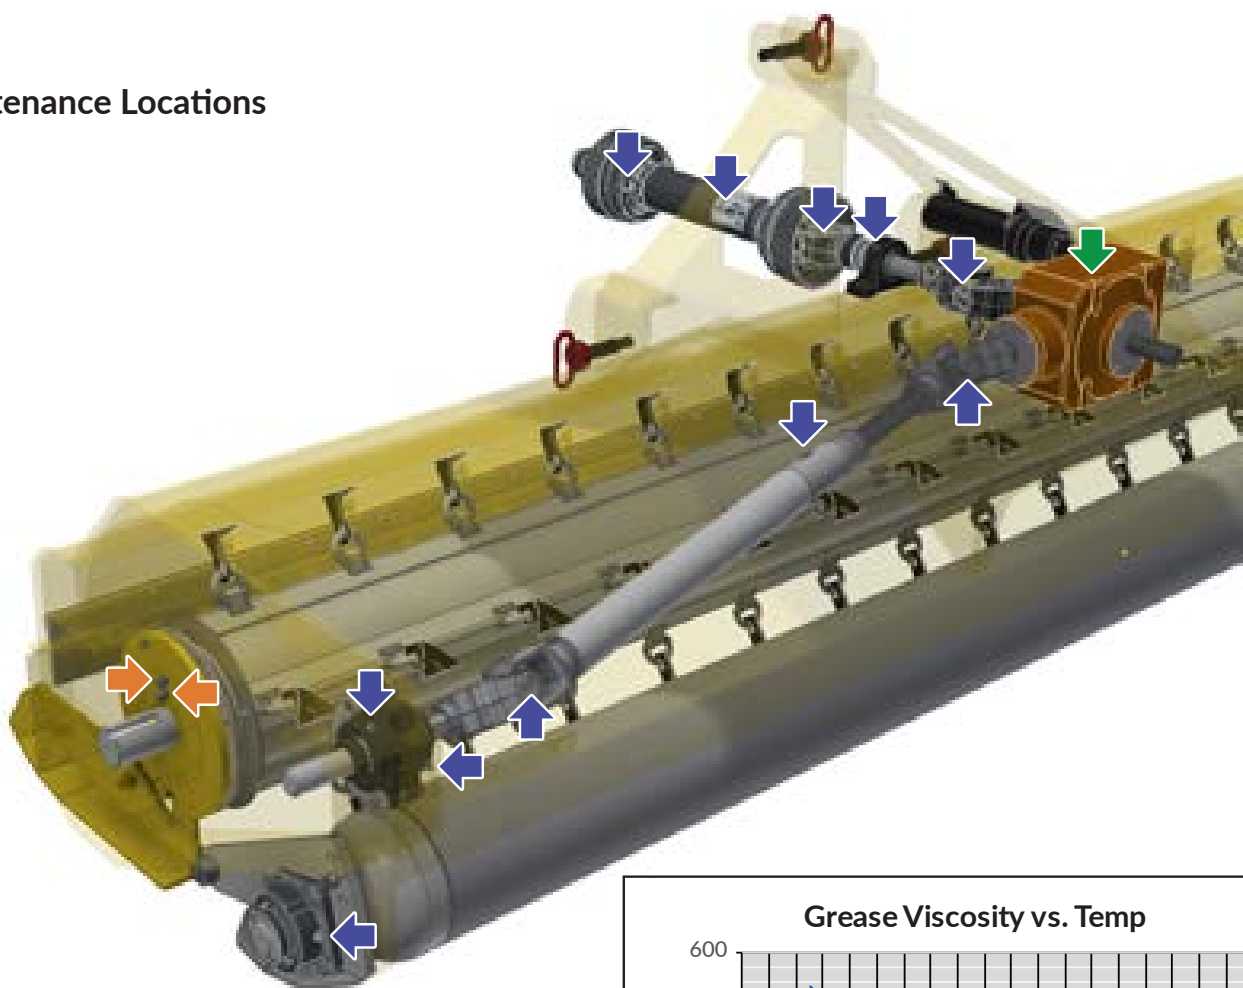

We understand that you have a lot of options when it comes to choosing your grease.

Any selection from the **Blue Group** of greases are equivalent, and any selection from the **Orange Group** of greases are equivalent.

Grease Comparison		KINEMATIC VISCOSITY cSt	
		TEMP DEG C	TEMP DEG C
NAME	NLGI GRADE	40	100
SCHAEFFER 228	2	555	36.5
PH66 MULTIPLEX FS460	1.5	460	48.3
MOBILITH SHC460	2	460	55.6
SHELL GADUS S3 V460D 2	2	460	61
MYSTIK JT-6 SYNTHETIC 460	2	460	59.1
MYSTIK JT-6 MULTIPURPOSE	2	460	59.1
PH66 MULTIPLEX 460	2	415	26.8
CHEVRON DELO EP2	2	226	20.7
PH66 DYNALIFE 220	2	220	18
SCHAEFFER 219	2	142	14.6
PH66 MULTIPLEX 150	2	144	10.8
MYSTIK JT-6 SYNTHETIC 100	2	100	16.3
MOBILITH SHC100	1.5	100	16.3
SHELL GADUS S2 V100 2	2	100	14
LUBRIPLATE EMB-3	2	100	14

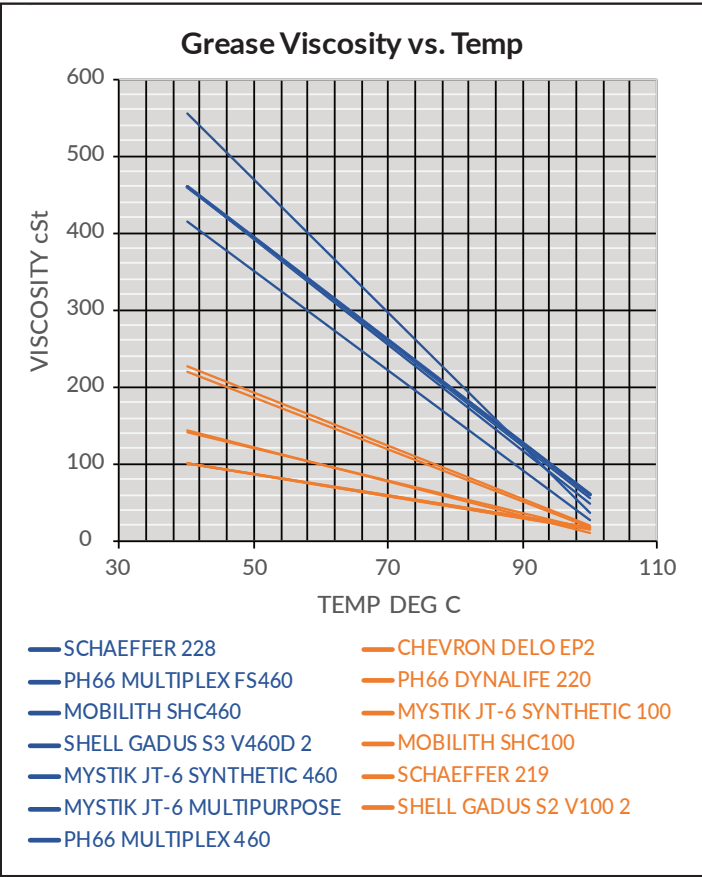

Transport, Removal and Storage

E. Transport, Removal and Storage

Disengage PTO and shut off engine allowing all movement to stop before leaving the operators position to adjust, lubricate, clean or unclog the machine.

Before working on or underneath the mower, place wheel chocks on both sides (front and rear) of Power Unit tires and under each end of the mower to prevent accidental lowering of the machine.

Also remove the ignition key from the Power Unit and allow all movement to stop before beginning work.

1. Transport on Power Unit

PTO must be disengaged, unit lifted off the ground.



Transport On Power Unit

2. Transport on Trailer

Use chain down locations even if unit is still attached to tractor, secure PTO shaft into the PTO rack.



Transport On Trailer

3. Removal

- Place attachment on ground with entire weight resting on mower.
- Remove the adjustable top link from the tractor and mower.
- Disconnect the drive shaft from the tractor and mower.
- Remove the safety pins from the lower three point arm pin location and disconnect the arms



Removal


4. Storage

- Place mower in clean, level, dry place.
- Put the drive shaft away in a clean, dry place.
- Clean the mower thoroughly (See "Cleaning your Mower" section for details).
- Relax belt tension (See "Adjustments & Maintenance" section for details).
- Lubricate the mower as recommended (See "Lubrication" section for details).
- Check oil level in gearbox and fill as required (See "Lubrication" section for details).
- Check for worn parts and replace so you will be ready to mow when necessary. (see "Adjustments & Maintenance" section).

Frequently Asked Questions

Q. When I am replacing gear oil, how much should I add?

A. When replacing gear oil, fill from the Upper Fitting. When oil level reaches Lower Middle Fitting, the box is full.

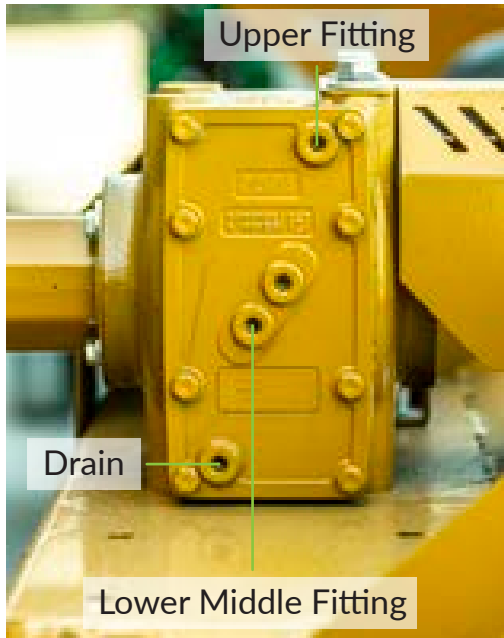

Q. How do I reverse cutter drum rotation?

A. To reverse cutter drum rotation, un-mount the gearbox from its default position, remove the safety cover from the other shaft of the gearbox and rotate the gearbox so that the previously covered shaft is the one that will be driven by the PTO. Install the safety covers.

Note: Scoop knives must be rotated to accommodate for a reversed cutter drum rotation.

Q. How do I replace my knives?


A. See the “Adjustments & Maintenance” section for detailed information.

Q. When connecting my PTO shaft, can I put it on either way or should a specific side go to the mower/shredder and the other to the Power Unit?



A. The PTO shafts are side specific. The tube half of the PTO shaft goes to the mower and the bar half of the PTO shaft goes to the Power Unit.

Q. Are there any advantages to reversing cutter drum rotation?

A. Whether reversing cutter drum is advantageous depends on the application. In most, normal rotation is a reverse rotation. This means that the cutter drum rotates in a fashion that would throw grass or clippings towards the tractor. The advantage to reversing rotation would be in industrial applications such as along freeways, in places with large amounts of debris (i.e. plastic, metal, rocks), or using a front mount application. There are typically no advantages in the grade of cut you will get.


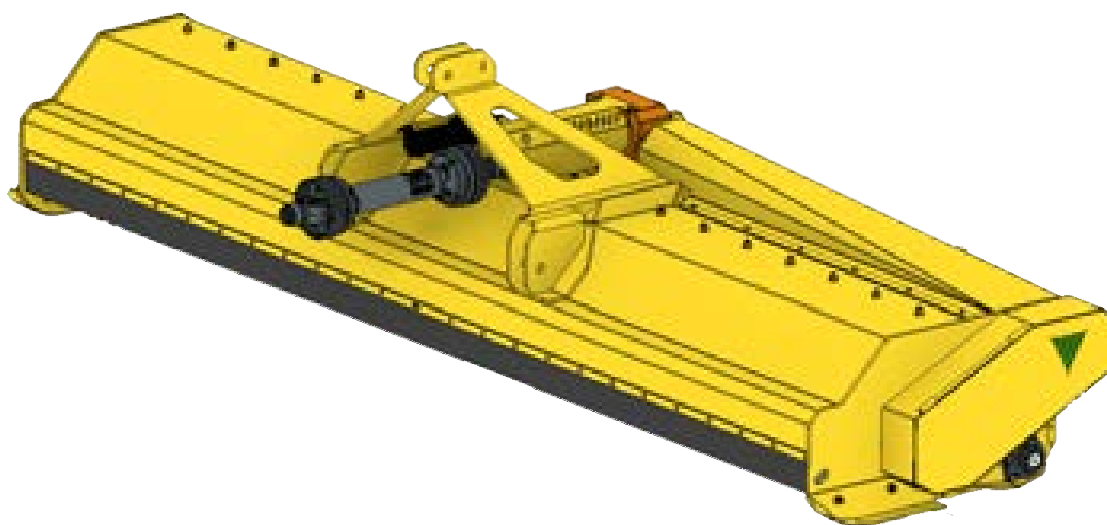


Parts: Top Shaft Assembly

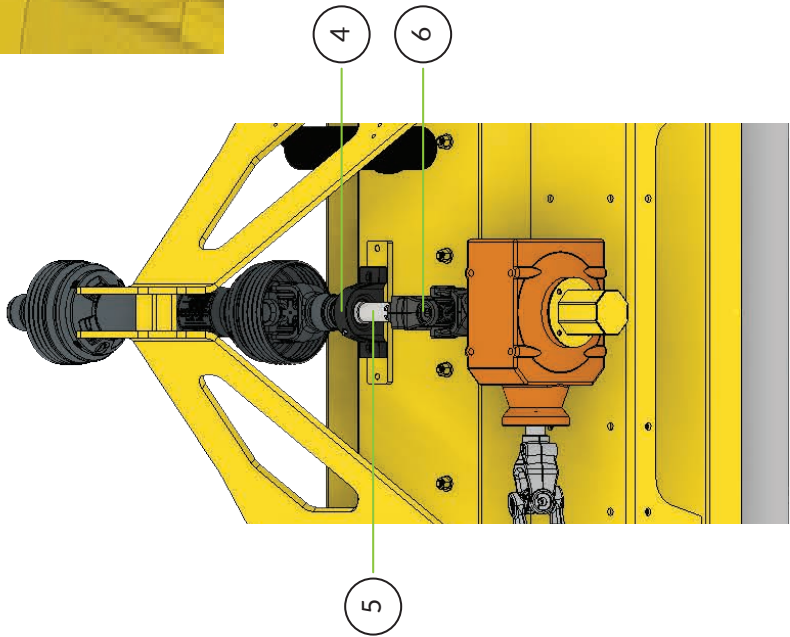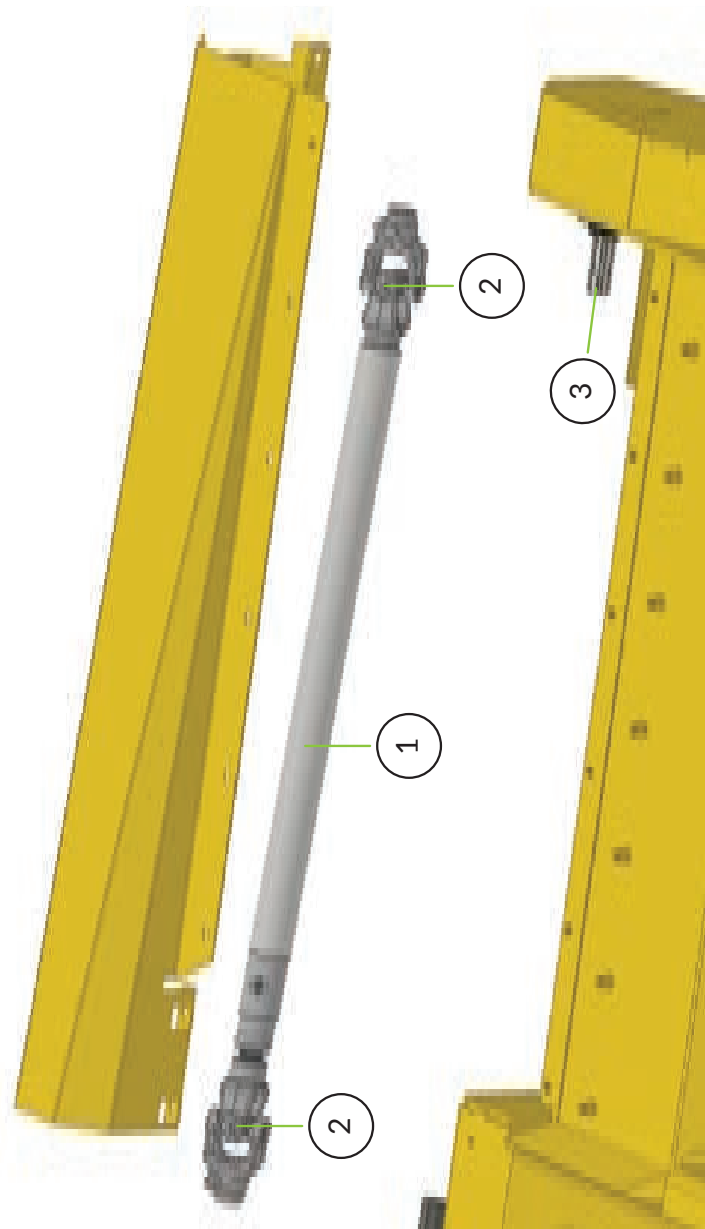


	DESCRIPTION	MODEL	QTY	P/N
1	Top Shaft 1 3/8" x 16" Center Mount	LP2084-LP2096	1	06000
1	Top Shaft 1 3/8" x 22" Center Mount	LP2108-LP2132	1	06049
1	Top Shaft 1 3/8" x 27 1/2" Center Mount	LP2144-LP2180	1	05996
2	Cross Repair Kit	ALL	1	DS-2230
3	Top Shaft Extension	ALL	1	05218
4	Bearing 1-3/8" Pillow Block	ALL	1	TS-1300
5	6 SPL x 6SPL Universal Assembly	ALL	1	DS-2227
6	Double Spline Shaft	ALL	1	DS-2226

Parts: Pulley Assembly

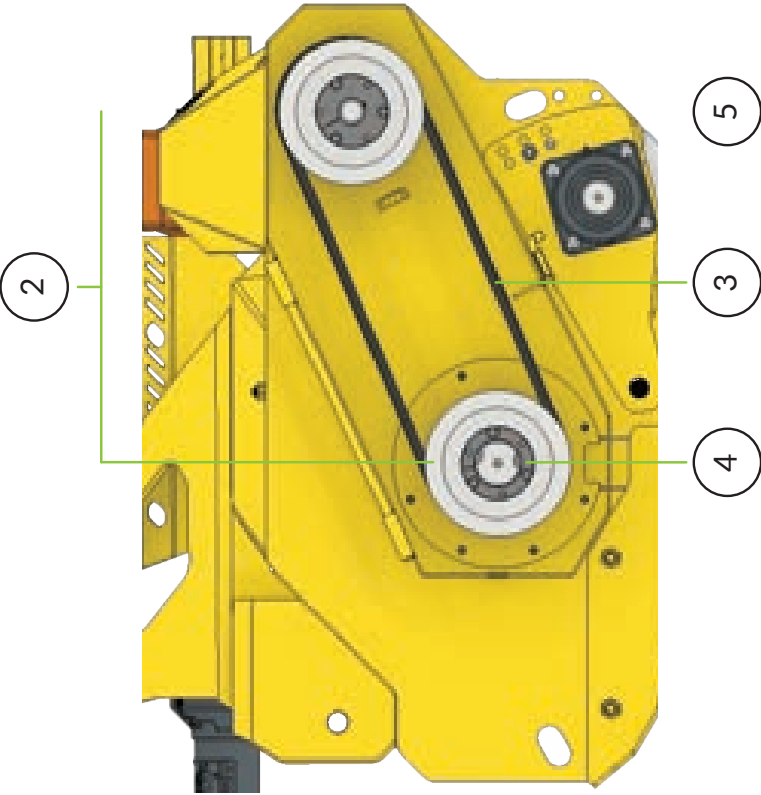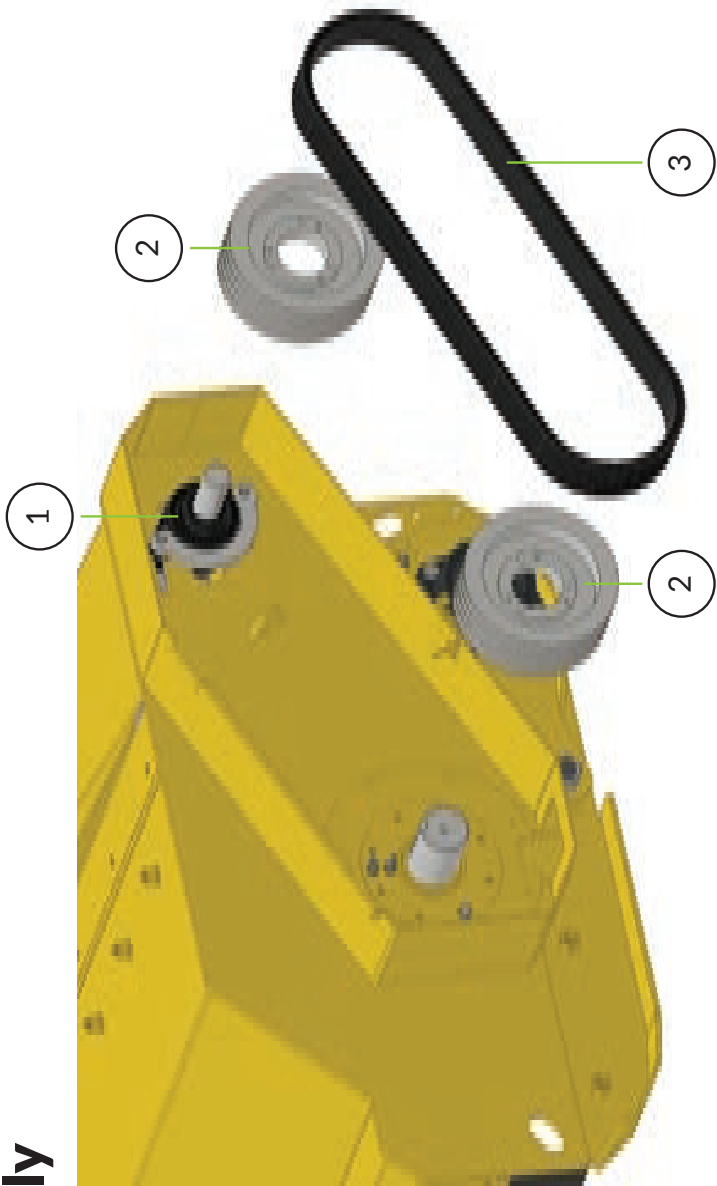

	DESCRIPTION	MODEL	QTY	P/N
1	Top Shaft Bearing	ALL	2	TS-1306
2	Pulley 7.4" OD 4B	ALL	2	P-1461
3	Belt 4-Band 4-B62	ALL	1	B-1922
4	Retainer Bushing - Top 1 3/8"	ALL	1	TL-1540
5	Retaining Bushing - Lower 2 7/8" 4G	ALL	1	TL-1550

Parts: Cutter Drum Assembly

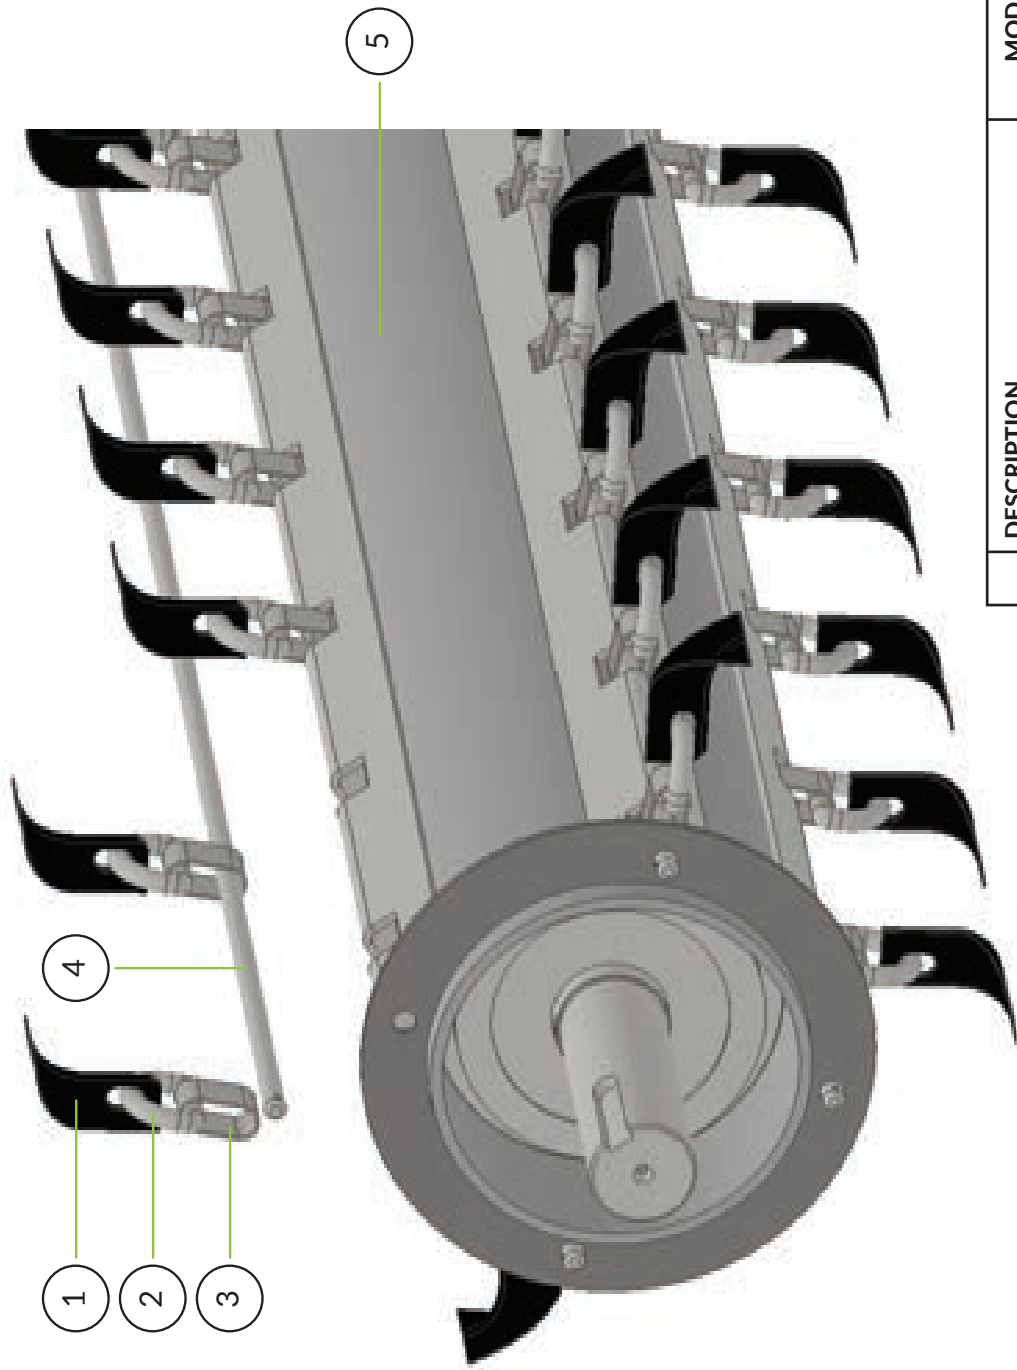

	DESCRIPTION	MODEL		
1	Standard Scoop Knife	ALL	See Below	
2	¾" D-Ring	ALL	See Below	
3	Quick Connect Changer	ALL	See Below	
4	Hanger Rod	ALL	4	
5	Assembly - Cutter Drum	ALL	1	See Below
	Wire Guard (Not Shown)	ALL	2	CD-3005

Parts: Cutter Drum Assembly Details

LP2084

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2467
Standard Scoop Knife	40	CD-2110
Industrial Knife	80	CD-2100
7/16" D-Ring	40	CD-2135
Quick Connect Changer	40	CD-2125
Hanger Rod	4	CD-1920

LP2120

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2677
Standard Scoop Knife	56	CD-2110
Industrial Knife	112	CD-2100
7/16" D-Ring	56	CD-2135
Quick Connect Changer	56	CD-2125
Hanger Rod	4	CD-1950

LP2156

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2717
Standard Scoop Knife	76	CD-2110
Industrial Knife	152	CD-2100
7/16" D-Ring	76	CD-2135
Quick Connect Changer	76	CD-2125
Hanger Rod	4	CD-1971

LP2096

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2734
Standard Scoop Knife	44	CD-2110
Industrial Knife	88	CD-2100
7/16" D-Ring	44	CD-2135
Quick Connect Changer	44	CD-2125
Hanger Rod	4	CD-1930

LP2132

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2685
Standard Scoop Knife	60	CD-2110
Industrial Knife	120	CD-2100
7/16" D-Ring	60	CD-2135
Quick Connect Changer	60	CD-2125
Hanger Rod	4	CD-1960

LP2168

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2724
Standard Scoop Knife	84	CD-2110
Industrial Knife	168	CD-2100
7/16" D-Ring	84	CD-2135
Quick Connect Changer	84	CD-2125
Hanger Rod	4	CD-1975

LP2108

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2735
Standard Scoop Knife	48	CD-2110
Industrial Knife	96	CD-2100
7/16" D-Ring	48	CD-2135
Quick Connect Changer	48	CD-2125
Hanger Rod	4	CD-1940


LP2144

DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2710
Standard Scoop Knife	68	CD-2110
Industrial Knife	136	CD-2100
7/16" D-Ring	68	CD-2135
Quick Connect Changer	68	CD-2125
Hanger Rod	4	CD-1970

LP2180


DESCRIPTION	QTY	P/N
Assembly - Cutter Drum	1	CD-2732
Standard Scoop Knife	92	CD-2110
Industrial Knife	184	CD-2100
7/16" D-Ring	92	CD-2135
Quick Connect Changer	92	CD-2125
Hanger Rod	4	CD-1980

Parts: Bearing Housing Drive Side

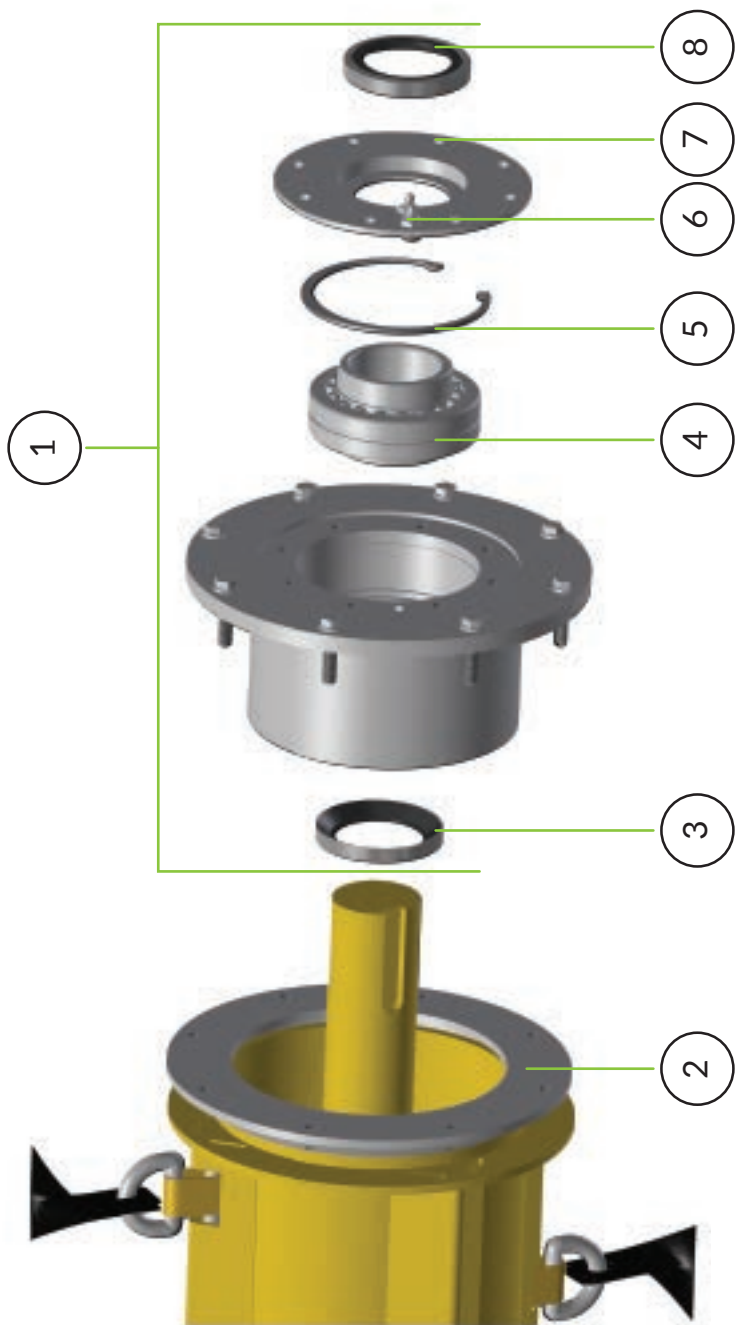


	DESCRIPTION	MODEL	QTY	P/N
1	Assembly Bearing Housing Drive Side Complete Kit	ALL	1	CD-3002
2	Wire Guard	ALL	1	CD-3005
3	Shaft Seal	ALL	1	SS-1000
4	2 7/16" Spherical Bearing	ALL	1	CD-3100
5	4 3/4" Internal Retaining Ring	ALL	1	SR-1200
6	Grease Zerk	ALL	2	HY-2440
7	Housing Cover - Drive	ALL	1	CD-3004
8	Shaft Seal	ALL	1	CD-3006

Parts: Bearing Housing Idle Side

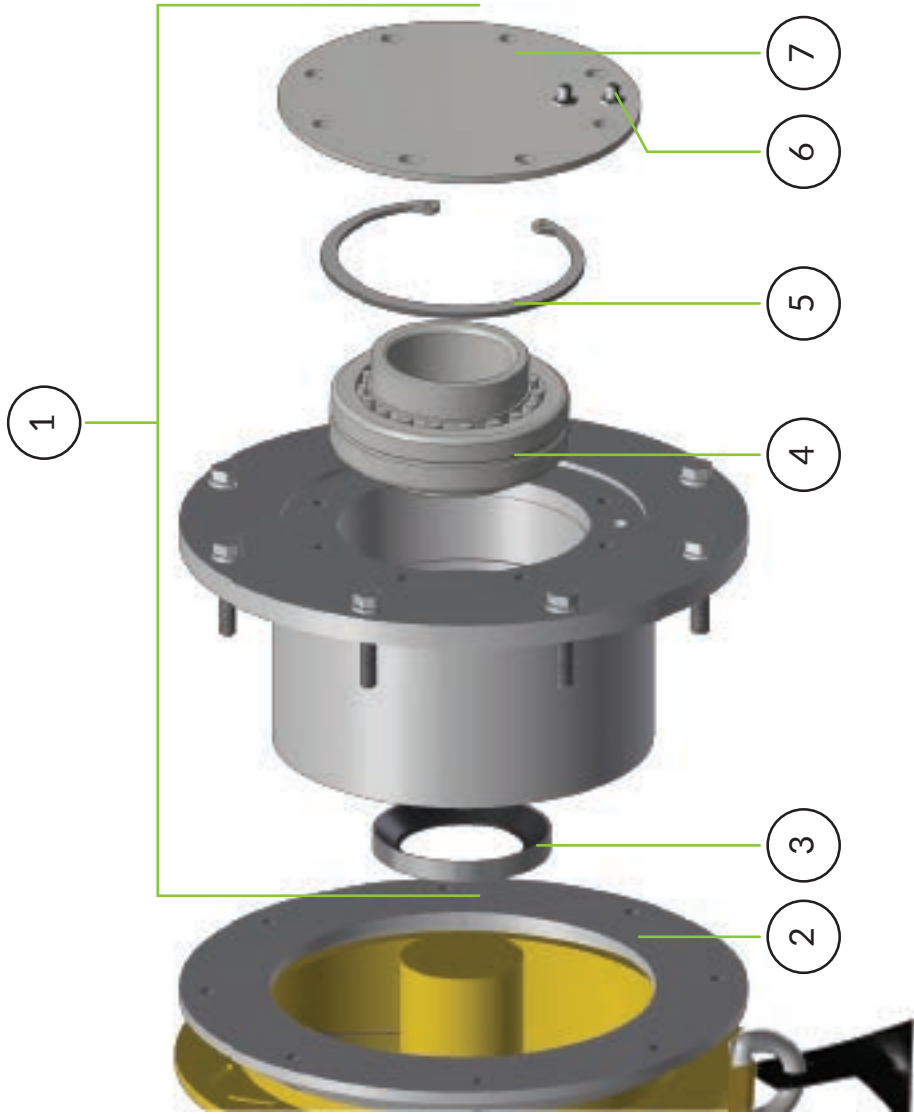


	DESCRIPTION	MODEL	QTY	P/N
1	Assembly Bearing Housing Idle Side Complete Kit	ALL	1	CD-3002
2	Wire Guard	ALL	1	CD-3005
3	Shaft Seal	ALL	1	SS-1000
4	2 7/16" Spherical Bearing	ALL	1	CD-3100
5	4 3/4" Internal Retaining Ring	ALL	1	SR-1200
6	Grease Zerk	ALL	2	HY-2440
7	Housing Cover - Drive	ALL	1	CD-3004

Parts: Back Roller Assembly

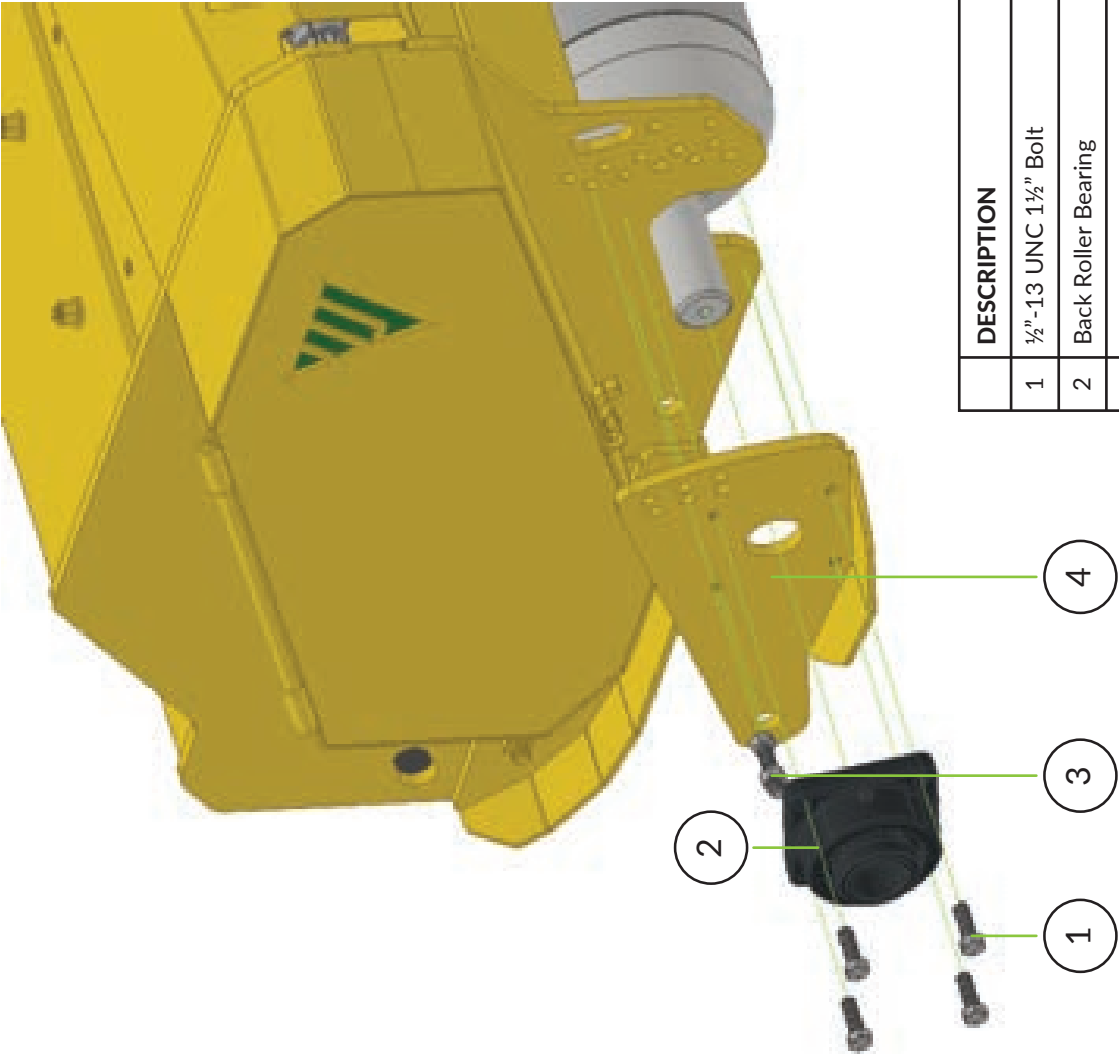


	DESCRIPTION	MODEL	QTY	P/N
1	1/2" - 13 UNC 1 1/2" Bolt	ALL	4	
2	Back Roller Bearing	ALL	2	BR-2404
3	1/2" - 13 UNC Locknut	ALL	4	
4	Back Roller Mount - Left Side	ALL	1	06197
4	Back Roller Mount - Right Side	ALL	1	06198

Parts: PTO Shaft Assembly - LP2084 - LP2132

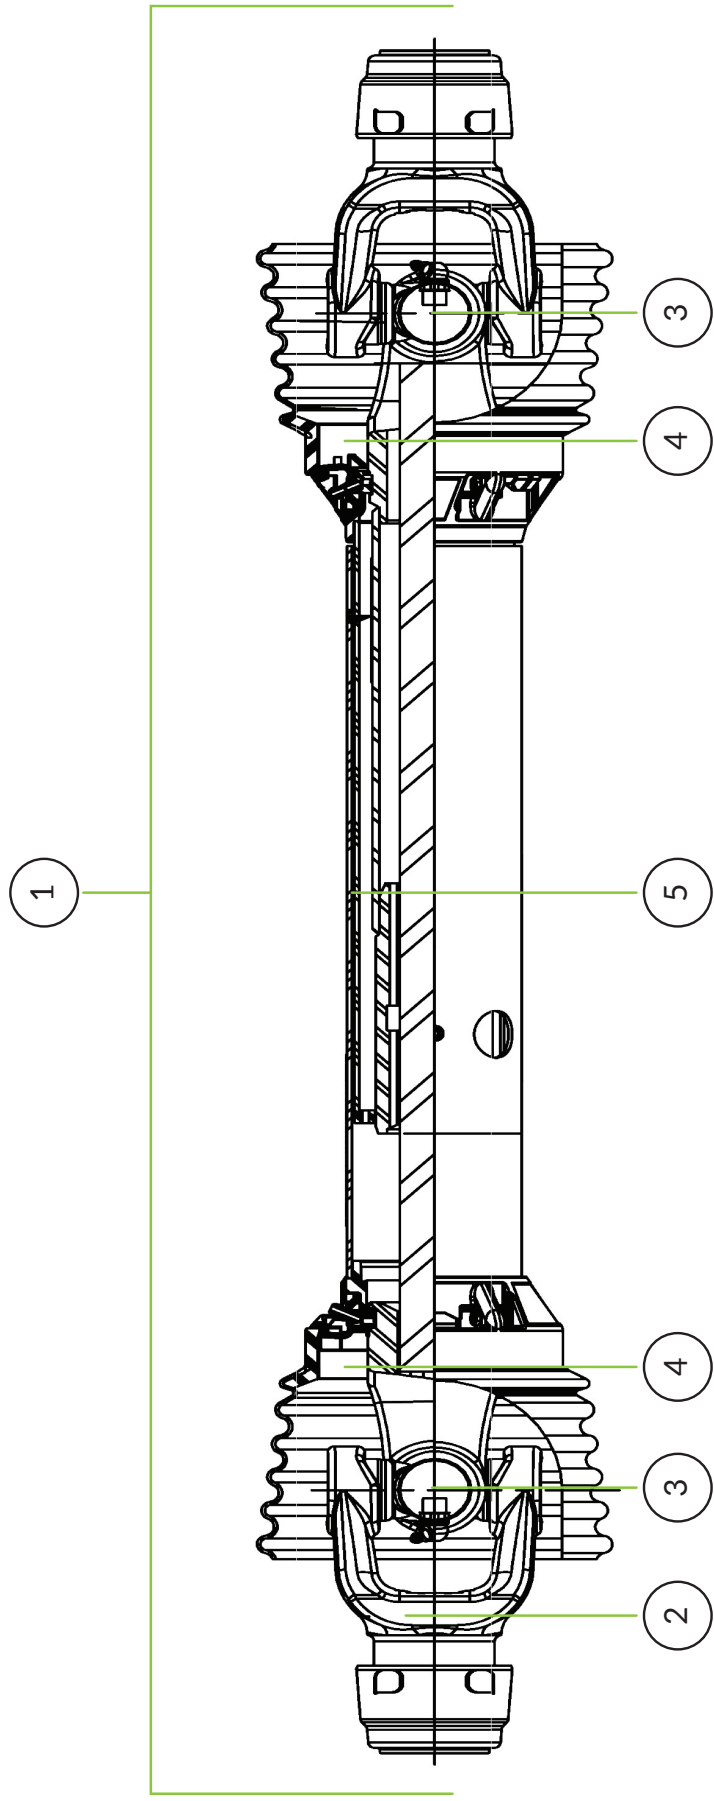


DESCRIPTION	MODEL	QTY	P/N
1 PTO Assembly Complete	LP2084-LP2132	1	DS-2200
2 1 1/2 6-Spline Yoke	LP2084-LP2132	2	DS-2220B
3 Cross Kit	LP2084-LP2132	2	DS-2230
4 Shield Retainer Kit	LP2084-LP2132	2	DS-193A2
5 Black Plastic Shield Complete	LP2084-LP2132	2	DS-193A1

Parts: PTO Shaft Assembly - LP2144 - LP2180

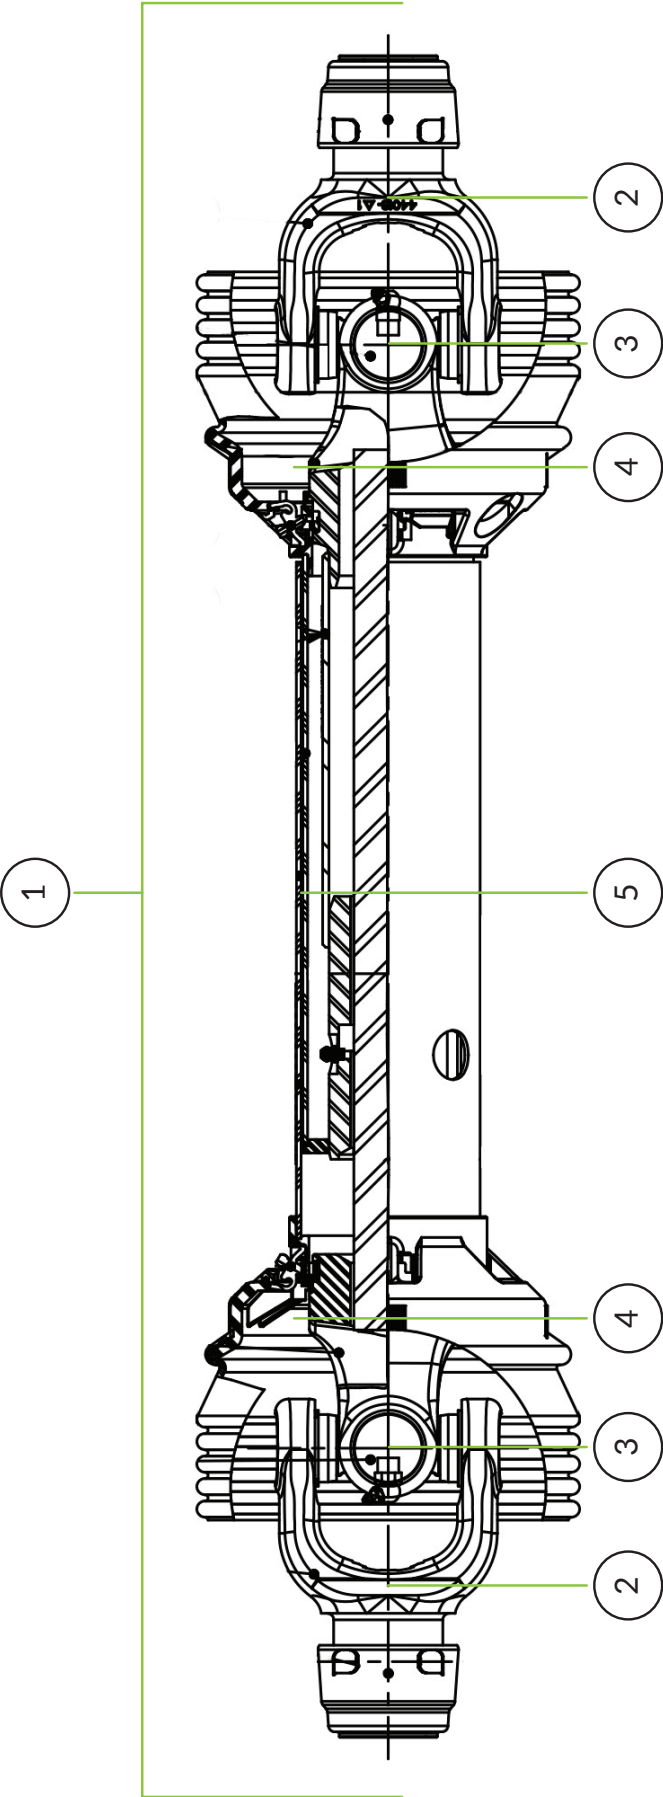


	DESCRIPTION	MODEL	QTY	P/N
1	PTO Assembly Complete	LP2144-LP2180	1	DS-2600
2	1 3/4 6-Spline Yoke	LP2144-LP2180	2	DS-2625
3	Cross Kit	LP2144-LP2180	2	DS-2626
4	Shield Retainer Kit	LP2144-LP2180	2	DS-2652
5	Black Plastic Shield Complete	LP2144-LP2180	2	DS-2650

Parts: Gearbox Assembly

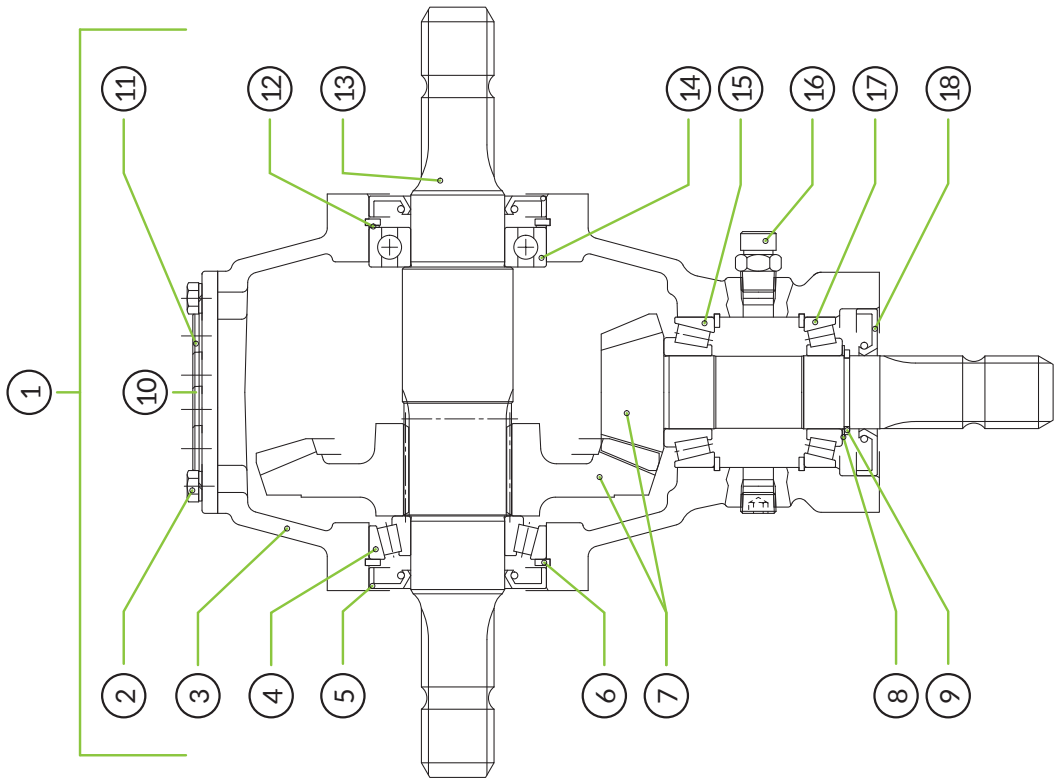

	DESCRIPTION	MODEL	QTY	P/N
1	Gear Box Assembly Complete	ALL	1	BP-2700
2	Screw Hex Head	ALL	8	BP-2705
3	Main Housing	ALL	1	BP-2701
4	Tapered Bearing Assembly	ALL	1	BP-2721
5	Oil Seal, Input	ALL	2	BP-2724
6	Snap Ring, Input	ALL	1	BP-2708
7	Ring & Pinion Gear Set	ALL	1	BP-2727
8	Shim Kit, Output	ALL	1	BP-2740
9	Snap Ring, Output	ALL	1	BP-2706
10	Rear Oil Plug	ALL	4	BP-2726
11	Rear Cover Plate	ALL	1	BP-2702
12	Shim Kit, Input	ALL	1	BP-2745
13	Input Shaft	ALL	1	BP-2703
14	Ball Bearing	ALL	1	BP-2720
15	Tapered Bearing Assembly	ALL	1	BP-2723
16	Air Breather	ALL	1	BP-2730
17	Tapered Bearing Assembly	ALL	1	BP-2722
18	Oil Seal, Output Shaft	ALL	1	BP-2725

Parts: General

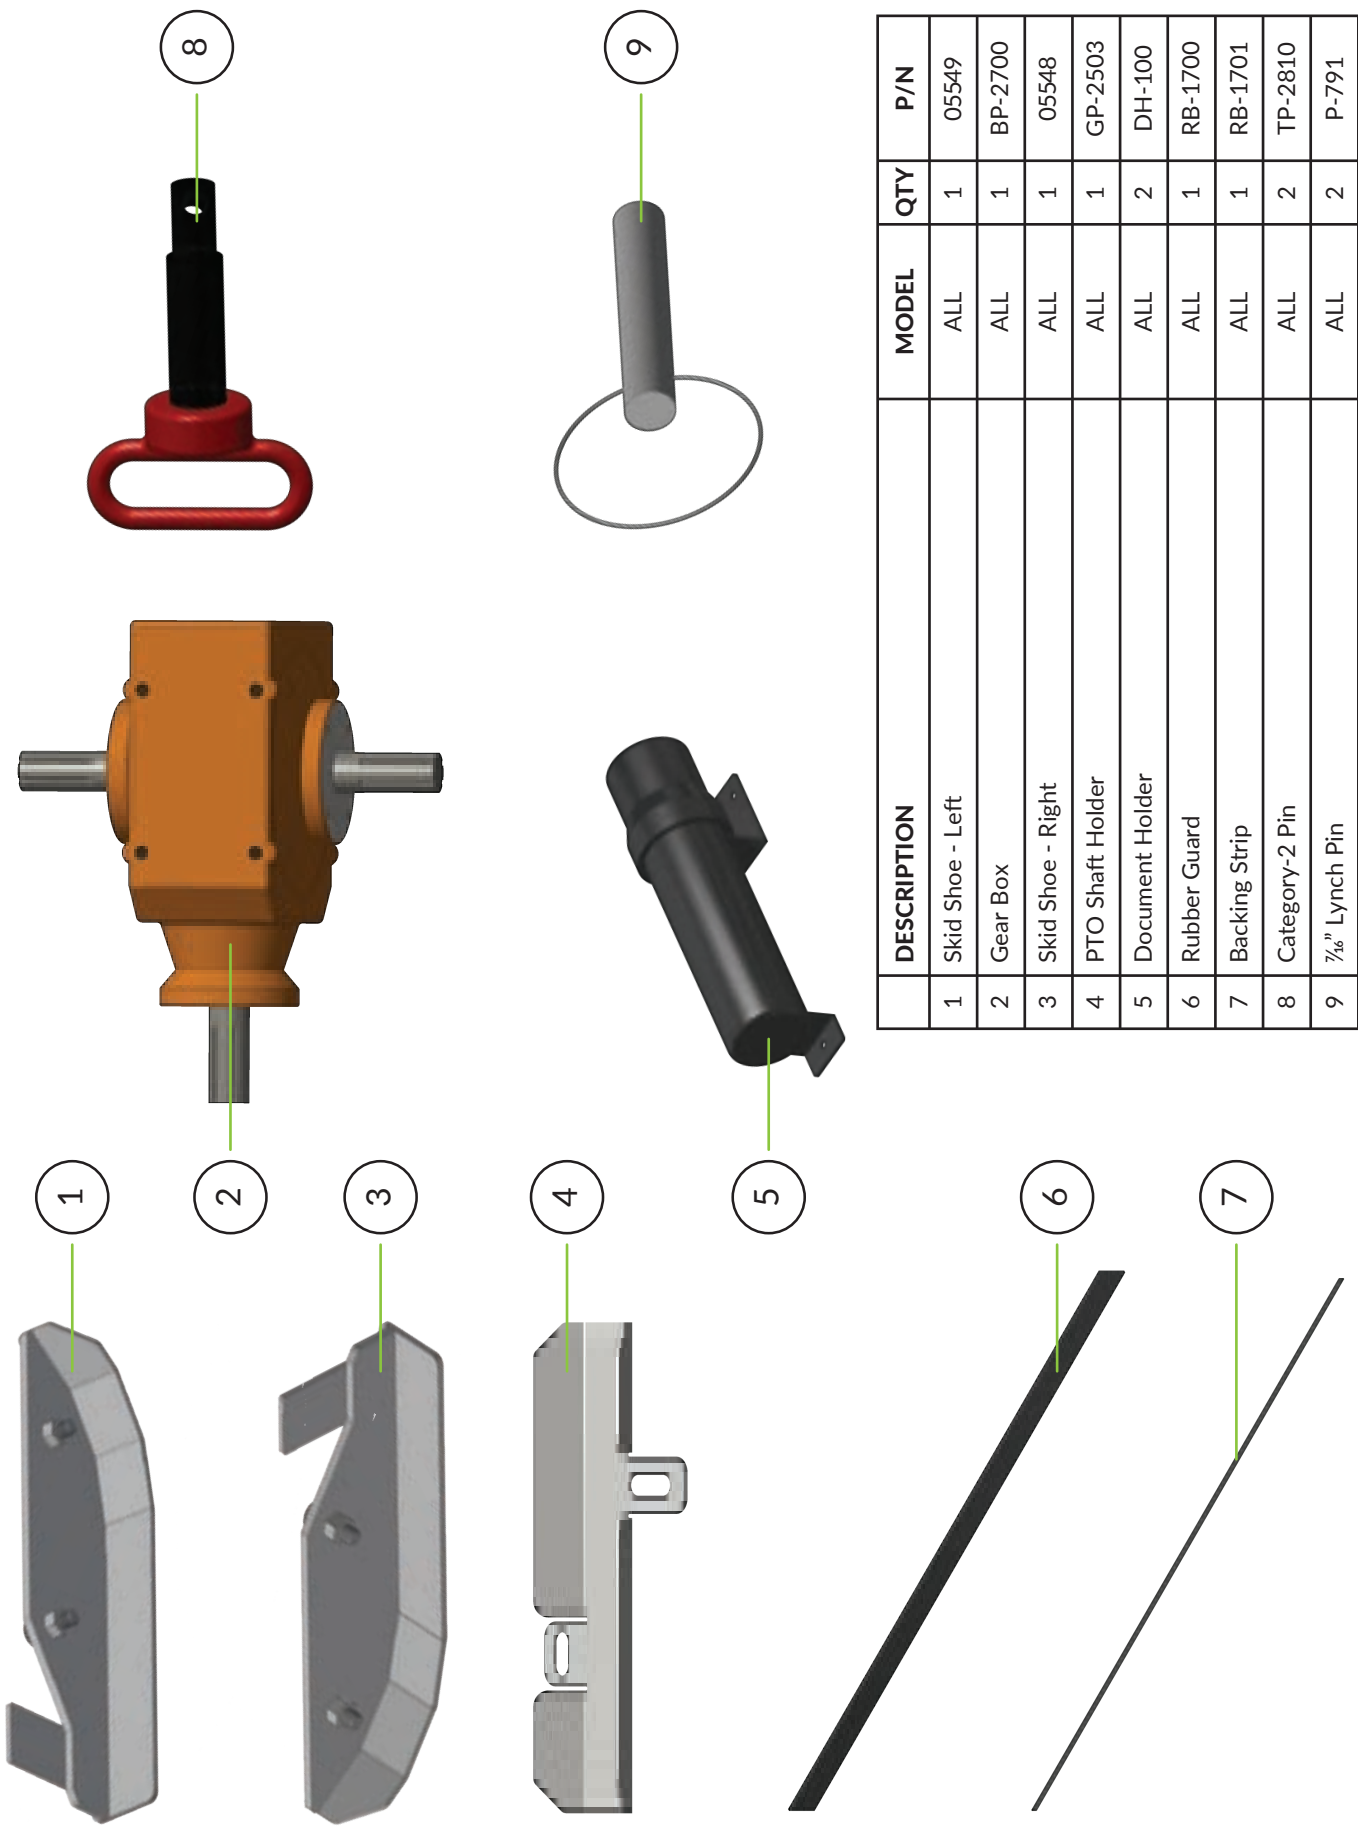

	DESCRIPTION	MODEL	QTY	P/N
1	Skid Shoe - Left	ALL	1	05549
2	Gear Box	ALL	1	BP-2700
3	Skid Shoe - Right	ALL	1	05548
4	PTO Shaft Holder	ALL	1	GP-2503
5	Document Holder	ALL	2	DH-100
6	Rubber Guard	ALL	1	RB-1700
7	Backing Strip	ALL	1	RB-1701
8	Category-2 Pin	ALL	2	TP-2810
9	7/16" Lynch Pin	ALL	2	P-791

Parts: Decal Set

**DANGER**

Rotating cutter drum can cause serious injury or throw dangerous debris. Keep away until drum has completely stopped its rotation.




DC-101

**WARNING**

Maintenance Openings
Moving components inside, keep back while unit is in operation.

DC-107

DC-107


**Vrisimo**
FLAIL MOWERS & SHREDDERS


LOW PROFILE SERIES
Orchard Flail Mower

MODEL NUMBER: []

SERIAL NUMBER: []

MACHINE WEIGHT: []

**VALLEY TOOL**
MANUFACTURING COMPANY

MADE IN USA

2557 Tully Rd. | 805-426-8815
Highland, CA 92343 | valleytooling.com

DC-118

DC-118

**Vrisimo**
FLAIL MOWERS & SHREDDERS

DC-119

**CAUTION**

Moving components inside. Do not operate this machine without proper guards in place.

DC-103

DC-103

**CAUTION**

Moving Parts exposed in this area. Stay clear while unit is operating.

DC-104

DC-104

**CAUTION**

Moving parts and/or high temperature areas enclosed. Do not operate machine with this guard removed.

DC-105

DC-105

READ BEFORE OPERATING

- Read the Owner's Manual before operating this machine.
- Do not operate the machine without guards, shields, and other safety devices in place and in proper working condition.
- Do not operate the machine when children and/or others are around.
- Do not operate this machine unless you have received proper training.

DC-109

DC-109




DC-113

DC-113

	DESCRIPTION	MODEL	QTY	P/N
1	DANGER	ALL	3	DC-101
2	CAUTION	ALL	1	DC-103
3	CAUTION	ALL	1	DC-104
4	CAUTION	ALL	1	DC-105
5	WARNING	ALL	1	DC-107
6	GENERAL WARNING	ALL	1	DC-109
7	Vrisimo Icon Decal	ALL	1	DC-113
8	Serial Number Plate	ALL	1	DC-118
8	Vrisimo Logo Decal	ALL	1	DC-119

REVISION: LPV3-220831

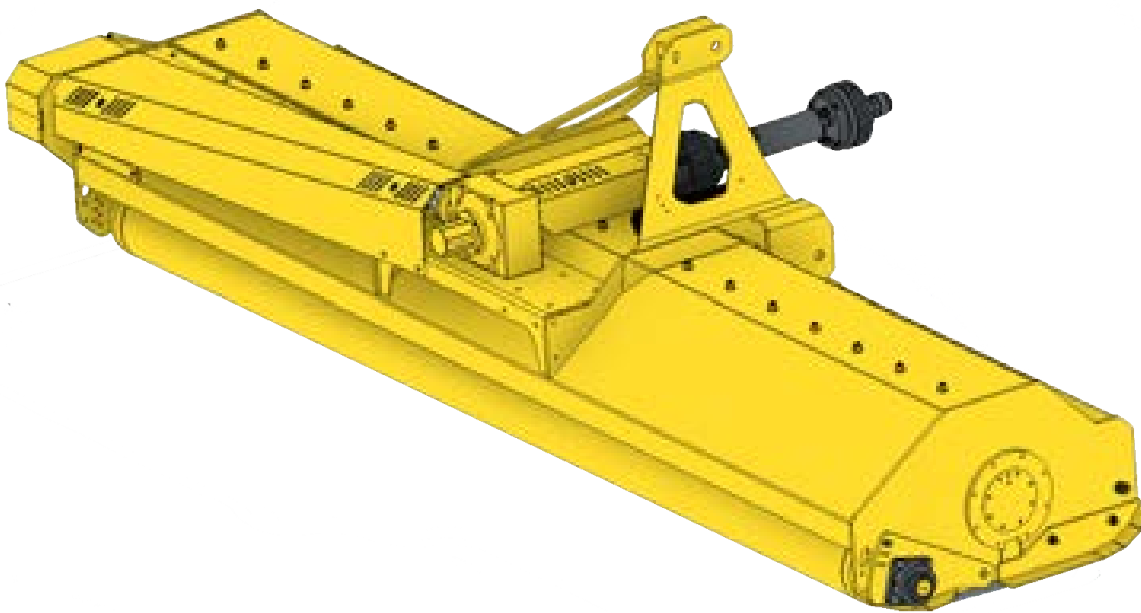

VALLEY TOOL
MANUFACTURING COMPANY

PO Box 220 | 2507 Tully Road | Hughson, CA 95326 | 800-426-5615
www.valleytoolmfg.com

ORCHARD LOW PROFILE SERIES OWNER'S MANUAL